


# 785nm, 80mW Wavelength Stabilized Lasers

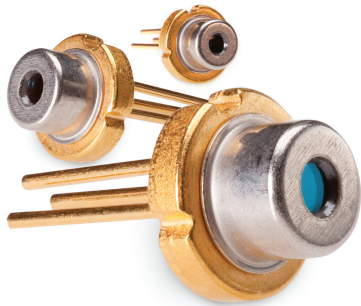

Single Frequency  
Wavelength Stability:  $\sim 0.015\text{nm}/^\circ\text{C}$

Ondax's 785nm Wavelength Stabilized Laser is a single mode, single frequency laser packaged in an ultra-compact, TO-can footprint. The extremely narrow linewidth, broad temperature operating characteristics, and low power consumption deliver affordable, portable instrument-quality performance for a broad range of instrumentation applications.

All SureLock™ Series lasers are stabilized using the Ondax PowerLocker® Volume Holographic Grating (VHG), ensuring precise, ultra-stable center wavelengths, low temperature dependence, and consistent optical performance over the locked region.

## Specifications:

### Specification Summary

| Parameter                               | Symbol          | Min | Typ | Max | Unit             |
|---|-----------------|-----|-----|-----|------------------|
| Output Power                            | $P_o$           |     |     | 80  | mW               |
| Center Wavelength (vacuum) <sup>1</sup> | $L_p$           | 784 | 785 | 786 | nm               |
|   | $L_p$           | 786 | 787 | 788 | nm               |
| Linewidth (MHz)                         | $\Delta\lambda$ |     | 50  |     | MHz              |
| Central Stabilized Temperature          | $T_c$           | 15  |     | 40  | $^\circ\text{C}$ |
| Stabilized Temperature Range            | $T_r$           | 10  | 15  |     | $^\circ\text{C}$ |

## Features:

- Single frequency performance
- Narrow linewidth  $< 50$  MHz
- Wavelength stability across operating range  $0.015\text{nm}/^\circ\text{C}$
- Coherence length  $> 2\text{m}$
- Compact, hermetically sealed TO footprint

## Applications:

- Raman Spectroscopy
- Speckle Interferometry
- Bio-instrumentation
- Metrology
- Sensing
- Analytical Instrumentation


### Operating Specifications

| Parameter                          | Symbol     | Min | Typ       | Max | Unit             |
|------------------------------------|------------|-----|-----------|-----|------------------|
| Threshold Current (CW)             | $I_{th}$   |     | 35        | 55  | mA               |
| Operating Current                  | $I_{op}$   |     | 115       | 160 | mA               |
| Operating Voltage                  | $V_{op}$   | 1.5 | 2         | 2.2 | V                |
| Laser Reverse Voltage              | $V_{rl}$   |     |           | 2   | V                |
| Monitoring Output Current          | $I_m$      | 0.1 | 0.5       | 0.7 | mA               |
| Beam Divergence, Perpendicular     | $Q_v$      | 15  | 17        | 19  | Degrees          |
| Beam Divergence, Parallel          | $Q_h$      | 8   | 9         | 10  | Degrees          |
| Off Axis Angle, Perpendicular      | $dQ_v$     | -2  |           | 2   | Degrees          |
| Off Axis Angle, Parallel           | $dQ_h$     | -2  |           | 2   | Degrees          |
| Emitter Size                       |            |     | 0.9 x 2.1 |     | $\mu\text{m}$    |
| Differential Efficiency            | DE (dp/dI) |     | 1.1       |     | mW/mA            |
| Operating Temperature <sup>2</sup> | $T_{op}$   | 0   |           | 50  | $^\circ\text{C}$ |
| Storage Temperature <sup>2</sup>   | $T_s$      | -20 |           | 70  | $^\circ\text{C}$ |
| Polarization                       |            |     | 100:1     |     |                  |
| Polarization Orientation           |            |     | TE        |     |                  |


<sup>1</sup>Please specify wavelength at time of ordering    <sup>2</sup>Non-condensing    All specifications are at rated power with a case temperature of  $25^\circ\text{C}$  unless otherwise noted

## 785nm, 80mW Wavelength Stabilized Lasers


### Stabilized Temperature Range

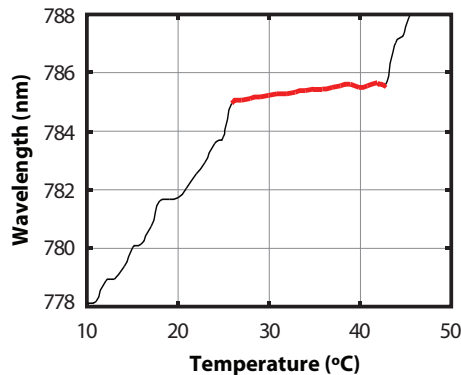


### Output Power vs Forward Current (Typical)

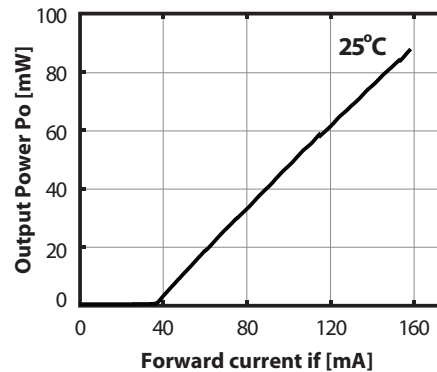

### Side View

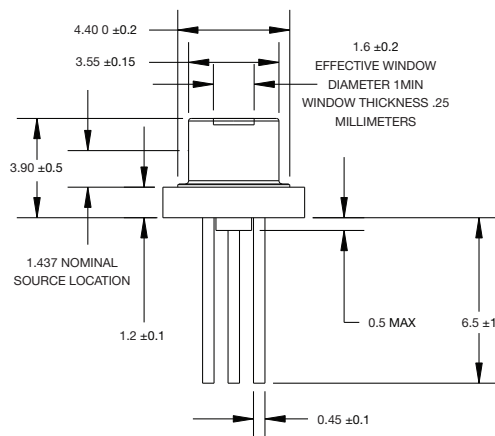

### Bottom View

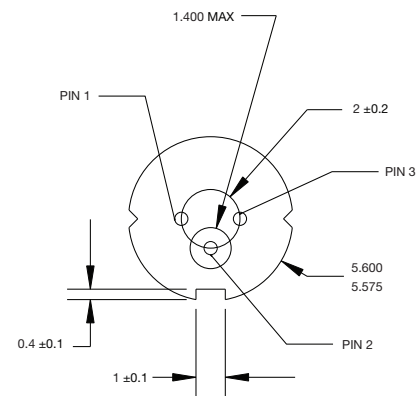

### Pinout

| Pin | Description         |
|-----|---------------------|
| 1   | Photodiode Anode    |
| 2   | Case                |
| 3   | Laser Diode Cathode |

### Model Numbers

TO-785-PLR80  
TO-787-PLR80

