

Fiber-Coupled Diode Laser Module

793 nm, 40 W, Conduction-Cooled,
Single Emitter-Based



OPTICAL PARAMETERS ¹	15F-HS16.1
Center Wavelength Range ³ (nm)	793
Center Wavelength Tolerance ³ (nm)	±5
Output Power ² (W)	40
Spectral Width (90% power content) (nm)	<3
Wavelength Temp. Coefficient (nm/°C)	~0.27
Slope Efficiency (W/A)	>12
Numerical Aperture (NA)	>90% in 0.15 (typ. 93%)
FIBER PARAMETERS ⁵	
Fiber Core Diameter (μm)	106.5 ±1.5
Fiber Clad Diameter (μm)	125 ±1
Fiber Coating Diameter (μm)	245 ±15
Numerical Aperture ³ (NA)	0.15 ±0.02
Fiber Length (m)	>2
Fiber Termination	Fiber Pigtail
ELECTRICAL PARAMETERS ¹	
Power Conversion Efficiency (%)	>40
Threshold Current (I _{TH}) (A)	<0.8
Operating Current (I _{OP}) (A)	5.0
Operating Voltage (V _{OP}) (V) max.	<32
THERMAL PARAMETERS	
Operating Temperature Range ^{3,4} (°C)	+20 to +30
Storage Temperature Range ⁴ (°C)	0 to +55
Recommended Heatsink Capacity (W)	60
Maximum Soldering Temperature for Electrical Leads (°C)	320
Maximum Soldering Time per Lead (s)	10

¹ Data at 25°C base plate temperature.

² Reduced lifetime if used above nominal operating conditions.

³ Others available upon request.


⁴ A non-condensing environment is required for storage and operation below the ambient dew point.

⁵ Non-detachable fiber.

MECHANICAL SPECIFICATIONS

Conduction-Cooled, Single Emitter-Based Fiber-Coupled Diode Laser Module

15F-HS16

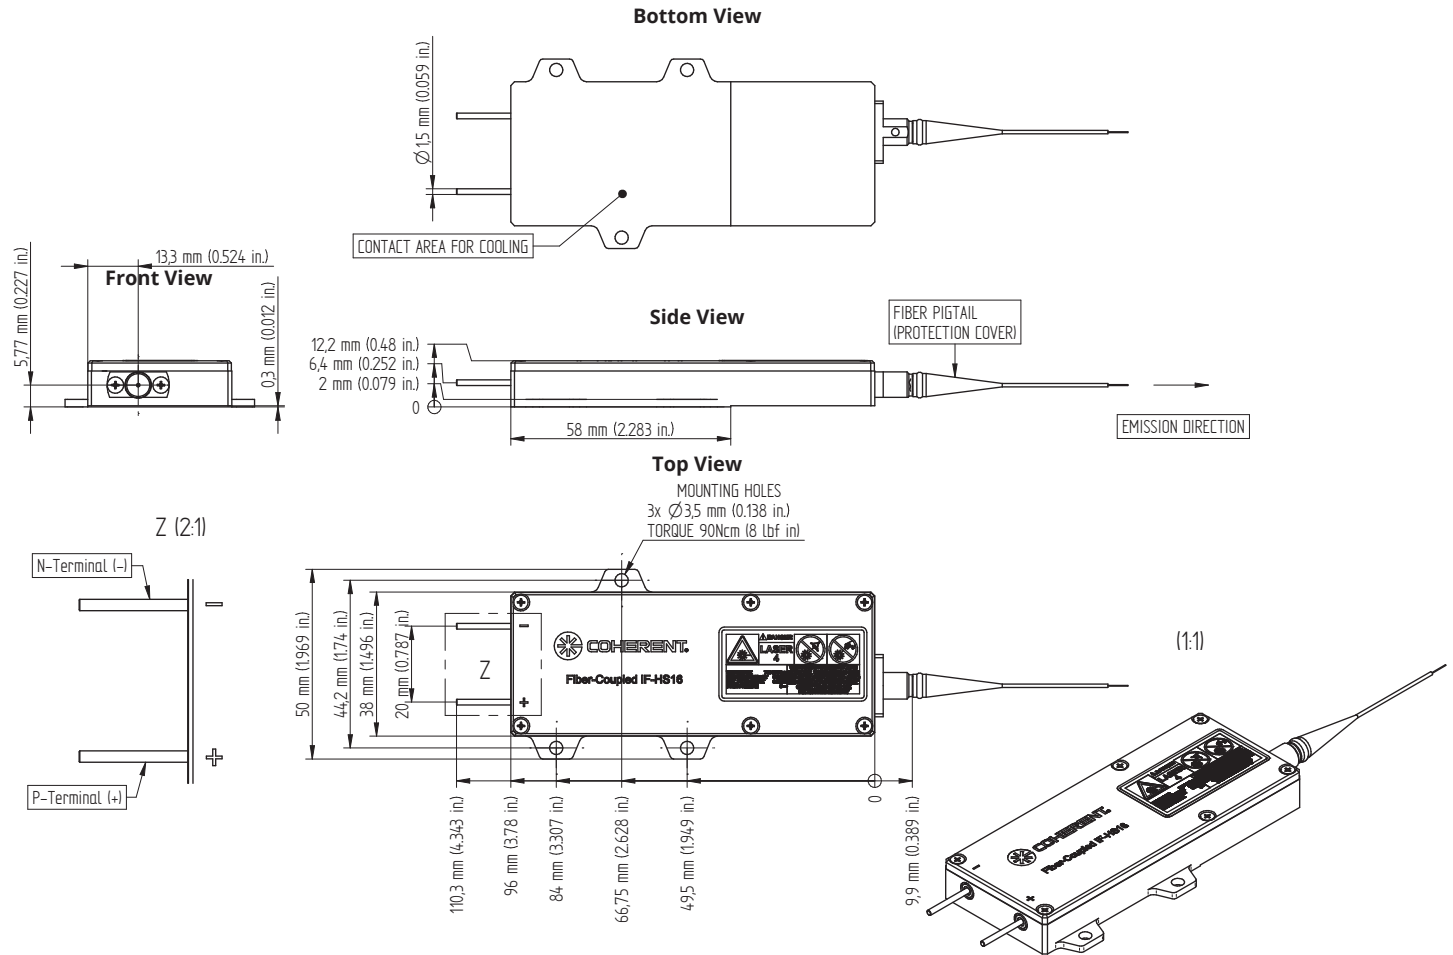

Coherent, Inc.,
 5100 Patrick Henry Drive Santa Clara, CA 95054
 p. (800) 527-3786 | (408) 764-4983
 f. (408) 764-4646

tech.sales@Coherent.com www.Coherent.com

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice.

All rights reserved. For handling precautions, please reference the general handling instruction manual.
 For full details, please visit www.coherent.com or contact your local Sales Representative.
 MC-012021 Copyright ©2021 Coherent, Inc.

