


## Aluminum optics meet short-wavelength application requirements

Although aluminum optics are a strong candidate to satisfy growing demand for low-cost, lightweight optics in military and spaceborne applications, it has historically been difficult—if not impossible—to reliably generate raw aluminum surfaces with the necessary surface parameters needed for high-performance, short-wavelength (visible and ultraviolet) applications such as satellite imaging. But engineers at Coherent (formerly Tinsley of Richmond, CA) have solved these challenges with fourth-generation fabrication processes that produce aluminum aspheric mirrors (even for common 6061-T6 alloys) up to 800 mm in diameter with surface figures as good as  $\lambda/100$  (at 633 nm), with root-mean-squared (RMS) surface roughness of just a few angstroms.

Rather than follow traditional means of applying a thick cladding of a harder and more easily polished metal like nickel to the aluminum substrate and suffer with thermally sensitive bimetallic optics, Coherent polishes aluminum

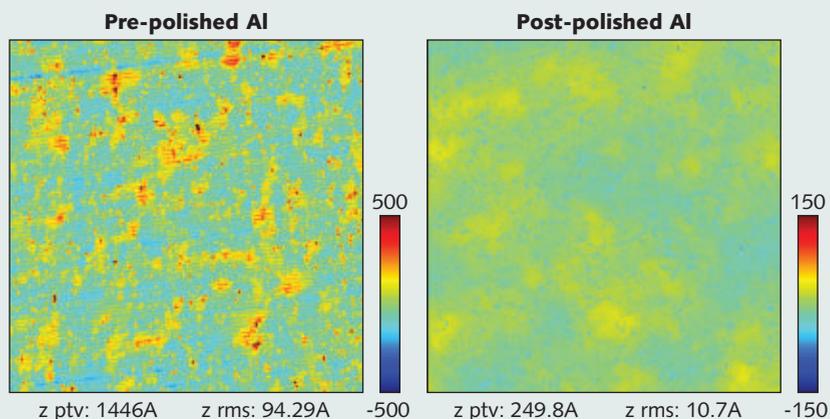

in a multi-step process. Single-point diamond turning (SPDT) is followed by Fizeau interferometry and/or a phase-measuring microscope test to program a robotic system for “deterministic polishing.” That is, variable dwell times are programmed for different locations on the optic as it is re-polished using a pad size appropriate for the optic and intended figure, together with proprietary polishing slurries. The optical surface is

iteratively re-measured and subjected to more deterministic polishing as necessary, to remove the SPDT grooves, correct any figure errors, and bring the surface roughness to the target value. After heat treating to relieve any stress-induced polishing, a binding material is applied to the surface, followed by a dielectric coating to provide the target reflectivity characteristics. *Reference:* <https://goo.gl/mLsa43>.