


COOLED 14PIN BUTTERFLY 980nm PUMP LASER MODULE

LC96Z***-7*

These lasers are designed as pump sources for erbium doped fiber amplifier (EDFA) applications. Processes and techniques of coupling the fiber to the laser allow high output powers that are very stable with both time and temperature.

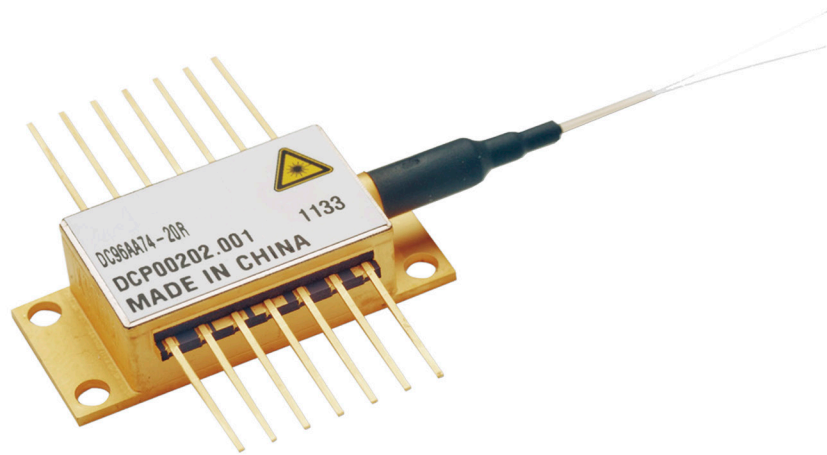

FEATURES

- High output power, up to 600 mW kink free
- Single-mode fiber pigtail
- Fiber Bragg grating stabilization for wavelength locking over the entire operating conditions
- Hermetically sealed 14 pin butterfly package
- Internal thermoelectric heatpump and monitor photodiode
- Telcordia GR-468-CORE compliant
- Field-proven high reliability
- RoHS compliant

APPLICATIONS

- Low noise EDFAs
- Dense wavelength division multiplexing (DWDM) EDFAs
- CATV Applications

COOLED 14PIN BUTTERFLY 980nm PUMP LASER MODULE

The LC96Z***-7* series pump module utilizes a fiber Bragg grating design for enhanced wavelength and power stability performance. This product has been designed to ensure superior wavelength locking over drive current, temperature and optical feedback changes.

Devices are available with kink free output powers to 600mW.

Wavelength Specification

Product Code		Min.	Typ.	Max.	Units	Condition
LC96Z***-74	λ_c	973	974	975	nm	Air reference. FBG temperatures is @ 25°C.
LC96Z***-76		975	976	977	nm	

Product Specification

Parameter		Min.	Typ.	Max.	Units	Condition
Threshold Current	I_{th}		50	70	mA	
Operating Forward Voltage	V_{op}		1.7	2.0	V	
Spectral Width	$\Delta\lambda$		0.2	1.0	nm	RMS at -13 dB
Signal to Noise Ratio	SNR	20			dB	
Temperature Dependence of Peak Wavelength	$\Delta\lambda/T$		0.008	0.01	nm/°C	FBG temperature dependency
Monitor Detector Responsivity	R_m	1	5	10	$\mu A/mW$	
Monitor Dark Current	I_{dark}			50	nA	-5V bias voltage
Fiber Power Stability >30 mW 20 – 30 mW 10 – 20 mW 5 – 10 mW	ΔP_{f_t}			0.08 0.08 0.10 0.15	dB	Peak-to-peak Time = 60 sec DC to 50 kHz
Return Loss	RL	35			dB	1500 nm – 1600 nm
Thermistor BETA Value	β	3500		4100	K	
Thermistor Resistance	R_{th}	9.5	10.0	10.5	k Ω	At submount temperature of 25°C
Heat Pump Current	I_{TEC}			2.0	A	T _{case} = 75°C, I _F = 1100mA
Heat Pump Voltage	V_{TEC}			3.0	V	
Heat Pump Power	P_{TEC}			6.0	W	
Total Module Power Consumption	P_{Total}			8.2	W	

Notes:

1. Conditions unless otherwise stated: Case temperature -20 to 75°C, Monitor diode bias -5 V, CW operation

COOLED 14PIN BUTTERFLY 980nm PUMP LASER MODULE

Optical Characteristics

Product Code	Minimum Kink-Free Power P _{kink} (mW)	Maximum Operating Power P _{op} (mW)	Maximum Operating Current I _{op} (mA)
LC96Z200-7*	200	180	375
LC96Z210-7*	210	190	395
LC96Z220-7*	220	200	410
LC96Z230-7*	230	210	430
LC96Z240-7*	240	220	450
LC96Z250-7*	250	225	460
LC96Z260-7*	260	235	475
LC96Z270-7*	270	245	495
LC96Z280-7*	280	255	510
LC96Z290-7*	290	265	530
LC96Z300-7*	300	275	545
LC96Z310-7*	310	280	555
LC96Z320-7*	320	290	575
LC96Z330-7*	330	300	595
LC96Z340-7*	340	310	610
LC96Z350-7*	350	320	630
LC96Z360-7*	360	325	640
LC96Z370-7*	370	335	655
LC96Z380-7*	380	345	675
LC96Z390-7*	390	355	695
LC96Z400-7*	400	365	710
LC96Z410-7*	410	375	730
LC96Z420-7*	420	380	740
LC96Z430-7*	430	390	755
LC96Z440-7*	440	400	775
LC96Z450-7*	450	410	795
LC96Z460-7*	460	420	810
LC96Z470-7*	470	425	820
LC96Z480-7*	480	435	840
LC96Z490-7*	490	445	855
LC96Z500-7*	500	455	875
LC96Z510-7*	510	465	895
LC96Z520-7*	520	475	910
LC96Z530-7*	530	480	920
LC96Z540-7*	540	490	940
LC96Z550-7*	550	500	955
LC96Z560-7*	560	510	975
LC96Z570-7*	570	520	995
LC96Z580-7*	580	525	1000
LC96Z590-7*	590	535	1000
LC96Z600-7*	600	545	1000

Notes:

1. Operating power assumes a 10% ageing margin: Operating Power = Kink-Free Power / 1.1

COOLED 14PIN BUTTERFLY 980nm PUMP LASER MODULE

Absolute Maximum Ratings

Parameter		Min.	Typ.	Max.	Units	Condition
Operating Case Temperature	T_{op}	-20		75	°C	
Storage Temperature	T_{stg}	-40		85	°C	
Storage Relative Humidity	RH_{stg}	5		95	%	But not to exceed 0.024 kg of water per 1.0 kg of dry air
Operating Relative Humidity	RH_{op}	5		85	%	
Pigtail Axial Pull Force				0.5	kg	1 minute
Pigtail Side Pull Force				0.25	Kg	90°, 4 directions, 5 s
Fiber Bend Radius		13			mm	
Lead Soldering Temperature				350	°C	10 sec
Laser Diode Forward Current	$I_{f_{max}}$			1100	mA	CW
Laser Diode Current Transient				1200	mA	Time = 1000 ns max
Laser Diode Reverse Current	I_r			10	μA	
Laser Diode Reverse Voltage	V_r			2.0	V	
Heat Pump Current	I_{TEC}	-2.4		2.4	A	Thermistor and TEC must be in closed control loop at all times




Optical Characteristics

Parameter		Min.	Typ.	Max.	Units	Condition
Fiber Type	Corning HI1060 or equivalent					
Cut-off Wavelength		870	920	970	nm	
Mode Field Diameter		5.6	5.9	6.2	μm	@ 980nm
Cladding Diameter		124.5	125	125.5	μm	
Fiber Coating Diameter		235	245	255	μm	Acrylate material, mechanically strippable
Grating Recoat Diameter		260	290	320	μm	
Core/cladding Concentricity				≤0.3	μm	
Fiber Proof Test		200			kpsi	
Fiber Bragg Grating Proof Test		150			kpsi	

1. Fiber termination: bare fiber with rough cleave

COOLED 14PIN BUTTERFLY 980nm PUMP LASER MODULE

Module Outline Drawing and Pin Connections

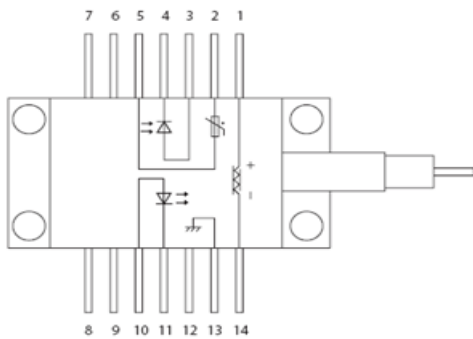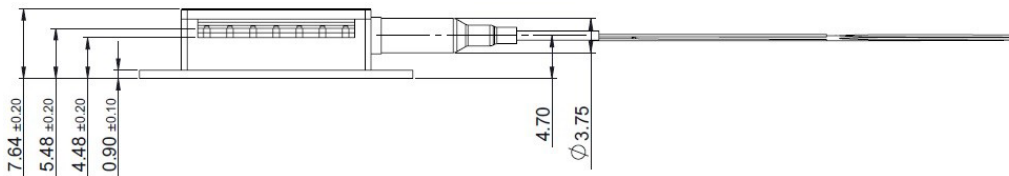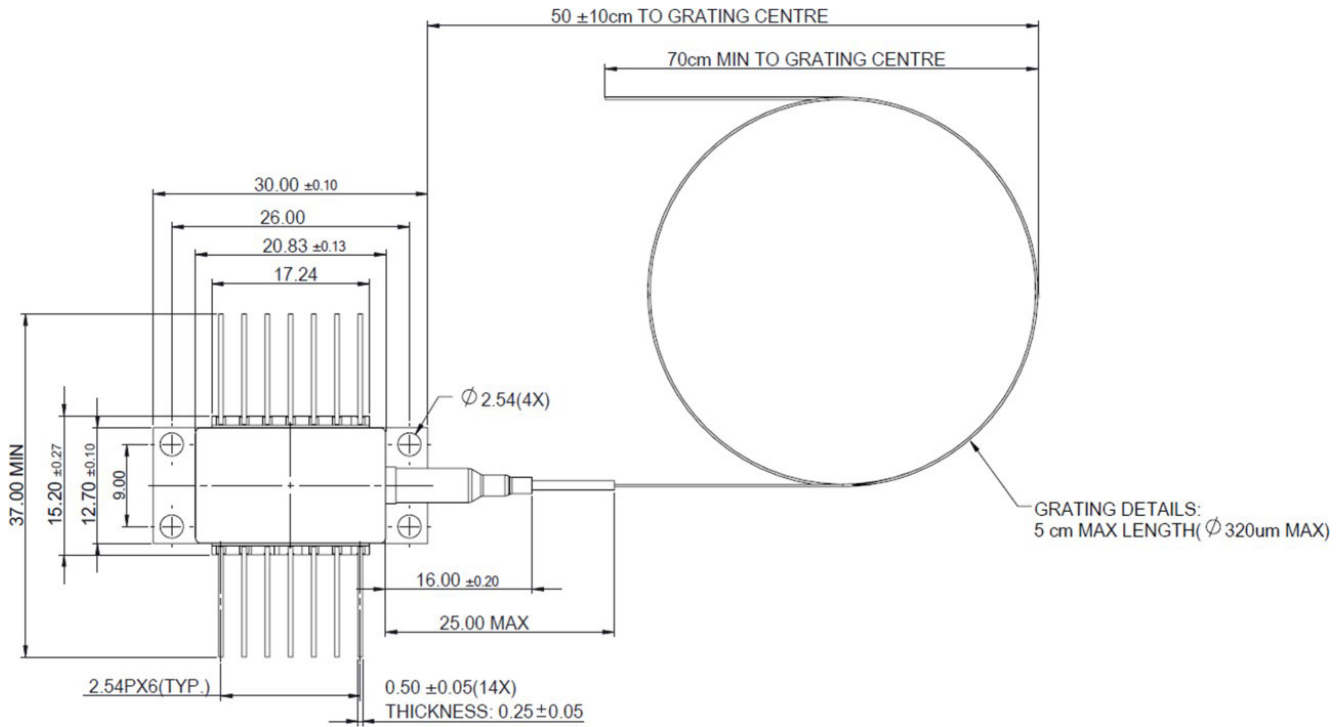

Notes:

1. All Dimensions in MM.
2. General tolerance: ±0.1 U.O.S
3. Surface texture: Ra1.6 U.O.S
4. Finish: Clear

Pin	Description	Pin	Description
1	Peltier cooler (+)	8	Not connected
2	Thermistor	9	Not connected
3	Monitor anode (-)	10	Laser anode (+)
4	Monitor cathode (+)	11	Laser cathode (-)
5	Thermistor	12	Not connected
6	Not connected	13	Case ground
7	Not connected	14	Peltier cooler (-)

COOLED 14PIN BUTTERFLY 980nm PUMP LASER MODULE

Ordering Information


LC	96	Z	***	-	7*
Product Type	Chip Type	Product Design	LD Kink Free Power (mW)	-	Wavelength 74 for 974 nm 76 for 976 nm

Example: LC96Z200-74 is a 200 mW Kink Free Power, 974 nm product.

RoHS Compliance

Coherent is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

User Safety



Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Coherent before they become applicable to any particular order or contract. In accordance with the Coherent policy of continuous improvement specifications may change without notice. Further details are available from any Coherent sales representative.