



WIDE TEMP. UNCOOLED 980 nm PUMP LASER DIODE MODULE

MLU96ZW***-7*H

The Coherent MLU96ZW***-7*H-series uncooled pump laser module represents continuing innovation in packaging technology to enable highly reliable pump laser sources for existing and emerging applications.

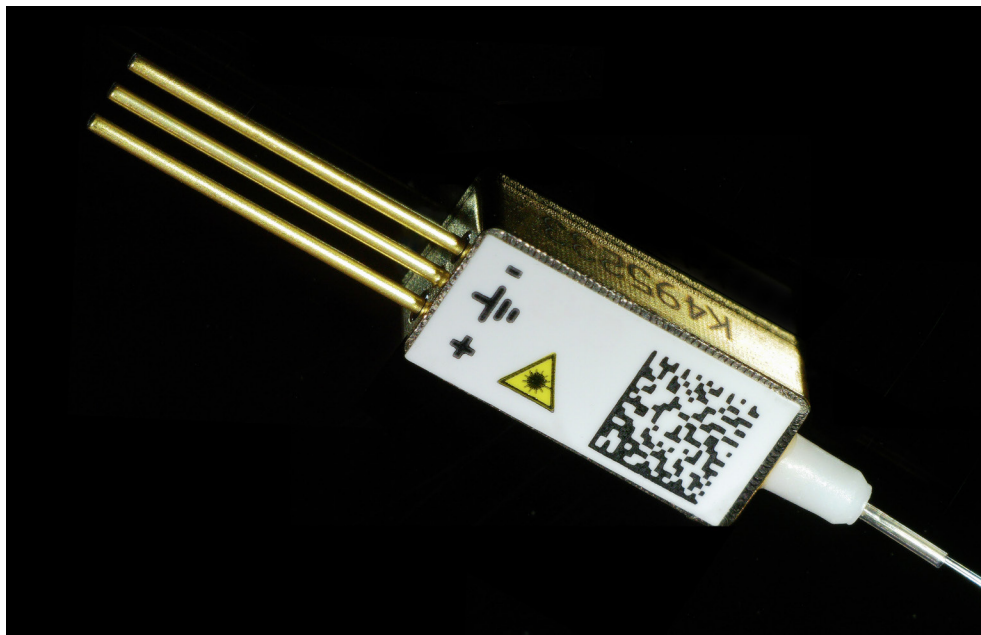

FEATURES

- Ultra-small package footprint: 10x4.4x3.2 mm (LxWxH)
- Up to 400 mW kink-free power over full operating temperature range
- -20 to 85°C Extended operating temperature range
- Low power consumption
- Low bend-loss, 125 μ m, HI1060 fiber supporting 7 mm bend radius
- Wavelength stabilized by fiber Bragg grating over entire operating range
- Centre wavelength at 974 or 976 nm
- Telcordia GR-468-CORE compliant
- RoHS compliant 

APPLICATIONS

- Integrated amplification within high bit-rate transceiver modules
- Low noise EDFA requiring higher optical power with low power consumption and small formfactor package
- Single or multi-stage EDFA applications including Single-channel and DWDM designs

WIDE TEMP. UNCOOLED 980 nm PUMP LASER DIODE MODULE

Housed within an ultra-compact 3-pin micro-format package with a volume of just 141 mm³, the laser module enables equivalent performance to the Coherent leading 8-pin uncooled mini-DIL products.

The laser module provides designers of ultra-compact integrated amplifier systems with the tools to enable low- noise, high power optical amplification within package volumes previously unachievable.

Combining a small package volume, 1 mm fibre feed-through, and low bend-loss HI1060 SM fibre, the module can enable integrated optical amplification within small form-factor platforms such as CFP2 and CFP4.

With <1 W typical power consumption and supporting an extended -20 to 85°C operating temperature range, the MLU96ZW***-7*H series pump fits within tight power-consumption budgets and addresses uncontrolled environmental requirements.

The MLU96ZW***-7*H series houses the market-proven Coherent enhanced G08 laser for superior reliability and stability, and the package is qualified to the requirements of Telcordia GR-468-CORE.

Optical Characteristics

Product Code	Minimum Kink-Free Power P_{kink} (mW)	Maximum Operating Power P_{op} (mW)	Typical Operating Current I_{op} (mA) @85°C	Maximum Operating Current I_{op} (mA) @85°C	Total power consumption @ Max operating conditions (W)
MLU96ZW100-7*H	110	100	260	340	0.49
MLU96ZW120-7*H	135	120	308	397	0.58
MLU96ZW140-7*H	155	140	348	453	0.65
MLU96ZW160-7*H	175	160	382	505	0.75
MLU96ZW180-7*H	200	180	432	561	0.84
MLU96ZW200-7*H	220	200	474	618	0.95
MLU96ZW220-7*H	245	220	517	675	1.06
MLU96ZW240-7*H	265	240	561	747	1.19
MLU96ZW260-7*H	285	260	605	803	1.33
MLU96ZW280-7*H	310	280	646	865	1.43
MLU96ZW300-7*H	330	300	689	927	1.54
MLU96ZW320-7*H	350	320	732	989	1.65
MLU96ZW340-7*H	375	340	774	1000	1.70
MLU96ZW360-7*H	395	360	817	1000	1.80
MLU96ZW380-7*H	420	380	860	1000	1.90
MLU96ZW400-7*H	440	400	903	1000	2.00

Notes:

1. Typical and maximum operating currents at 85°C
2. Operating power assumes a 10% ageing margin: Operating Power = Kink Free Power / 1.1

WIDE TEMP. UNCOOLED 980 nm PUMP LASER DIODE MODULE

Wavelength Specification

Product Code	Min.	Typ.	Max.	Units	Condition
MLU96ZW***-74H	972	974	976	nm	Air reference. Over entire operating temperature range
MLU96ZW***-76H	974	976	978		

Product Specification ¹

Parameter		Min.	Typ.	Max.	Units	Condition
Threshold Current	I_{th}		55	100	mA	
Operating Forward Voltage	V_{op}		1.65	2.0	V	
Spectral Width	$\Delta\lambda$		0.2	1.0	nm	RMS at -13 dB
Power in Band Ratio >100 mW 50 mW to 100 mW	PIB	90 75			%	$\lambda_c \pm 1.5$ nm, -20°C to 85°C
Fiber Power Stability >30 mW 20 – 30 mW 10 – 20 mW 5 – 10 mW	$\Delta P_{r,t}$			0.10 0.10 0.15 0.20	dB	Peak-to-peak Time = 60 sec DC to 50 kHz
Return Loss	RL	35			dB	1500 nm – 1600 nm

Note 1: All characteristics at <-40 dB back reflection

Absolute Maximum Ratings

Parameter		Min.	Typ.	Max.	Units	Condition
Operating Case Temperature	T_{op}	-20		85	°C	
Storage Temperature	T_{stg}	-40		85	°C	
Storage Relative Humidity	RH_{stg}	5		95	%	But not to exceed 0.024 kg of water per 1.0 kg of dry air
Operating Relative Humidity	RH_{op}	5		85	%	
Pigtail Axial Pull Force				0.25	kg	1 minute
Fiber Bend Radius		7			mm	
Lead Soldering Temperature				350	°C	10 sec
Laser Diode Forward Current	$I_{f,max}$			1100	mA	
Laser Diode Current Transient				1200	mA	Time = 1000 ns max
Laser Diode Reverse Current	I_r			10	μA	
Laser Diode Reverse Voltage	V_r			2.0	V	
ESD Threshold				500	V	HBM, C = 100 pF, R = 1.5 kΩ

WIDE TEMP. UNCOOLED 980 nm PUMP LASER DIODE MODULE


Fiber Specification

Parameter	Min.	Typ.	Max.	Units	Condition
Fiber Type	HI1060 Fibre				
Cut-off Wavelength	870		970	nm	
Mode Field Diameter	5.6	5.9	6.2	μm	@ 980nm
Cladding Diameter	124.5	125	125.5	μm	
Fiber Coating Diameter	235	245	255	μm	Acrylate material, mechanically strippable
Core/cladding Concentricity			<0.3	μm	
Fiber Proof Test	200			kpsi	
Fibre Length	750			mm	No re-coated region along length



Notes:

1. Fiber termination; bare fiber with rough cleave.

Module Outline Drawing and Pin Connections

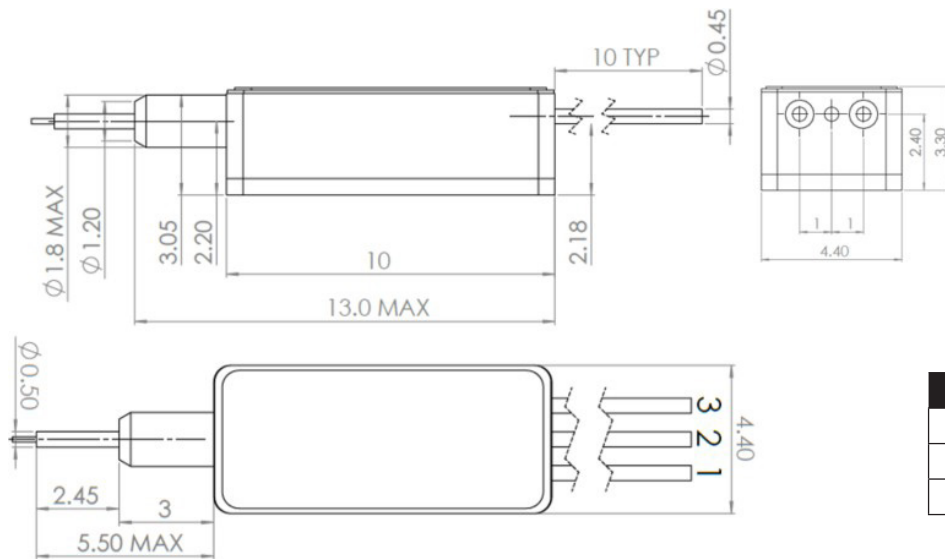

Pin	Connection
1	Laser Diode Cathode (-)
2	Package Ground
3	Laser Diode Anode (+)

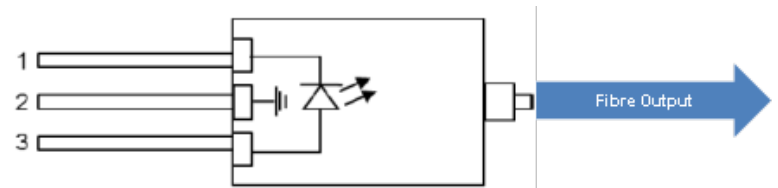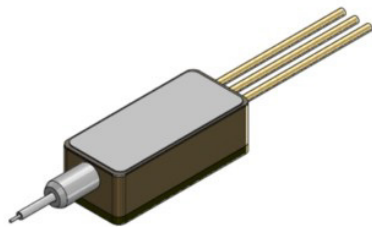

WIDE TEMP. UNCOOLED 980 nm PUMP LASER DIODE MODULE

Ordering Information

MLU	96Z	W	***	-	7*	H
Product Type	Chip Type	-20 to 85°C Temperature Range	LD Operating Power (mW)	-	Wavelength 74 for 974 nm 76 for 976 nm	HI1060 Fibre Pigtail


Example: MLU96ZW220-74H is a 220 mW Operating Power, 974 nm product

RoHS Compliance

Coherent is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

User & Product Safety

Invisible laser radiation. Avoid eye or skin exposure to direct or scattered radiation. Class 4 laser product. ESD protection. Caution. Static sensitive device. To be opened by authorised personnel only.

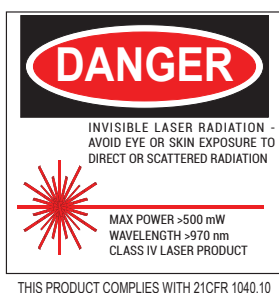

Caution - use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Coherent before they become applicable to any particular order or contract. In accordance with the Coherent policy of continuous improvement specifications may change without notice. Further details are available from any Coherent sales representative.

This product is protected by patents and patent applications pending worldwide.