



Genesis Taipan HD-Series

High-Definition, High-Power Optically Pumped Semiconductor Lasers (OPSL)

Coherent's Genesis Taipan series delivers richer, more vibrant colors for commercial laser lightshows. Based on our patented Optically Pumped Semiconductor Laser (OPSL) architecture, these lasers deliver high output powers with direct modulation capabilities.

Genesis Taipan HD features low divergence, TEM₀₀ beams at up to 5W, ideally suited for long throw, outdoor laser projection. Combined with Genesis Taipan 639, Genesis Taipan HD provides true D65 white light with unmatched beam performance.

Clean room built and sealed, maintenance-free design and TEC cooling guarantees low cost-of-ownership and industrial reliability.

FEATURES

- Patented Coherent OPSL technology
- 6 discrete colors matching Coherent Genesis Taipan to 5W of scalable output power depending on color
- Highest brightness due to Single Transverse Mode (TEM₀₀) beam
- Capable of lowest possible divergence (diffraction limited)
- Continuous Wave (CW) operation or high speed driver limited modulation
- Sealed, maintenance free, compact and TEC-cooled packaging for high reliability

APPLICATIONS

- Laser Light Show
- Laser Entertainment



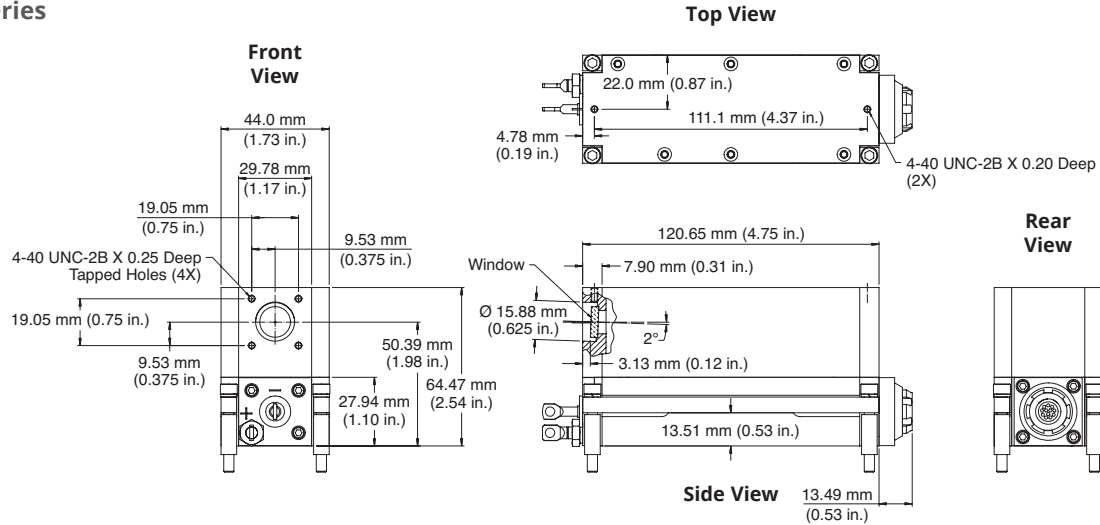
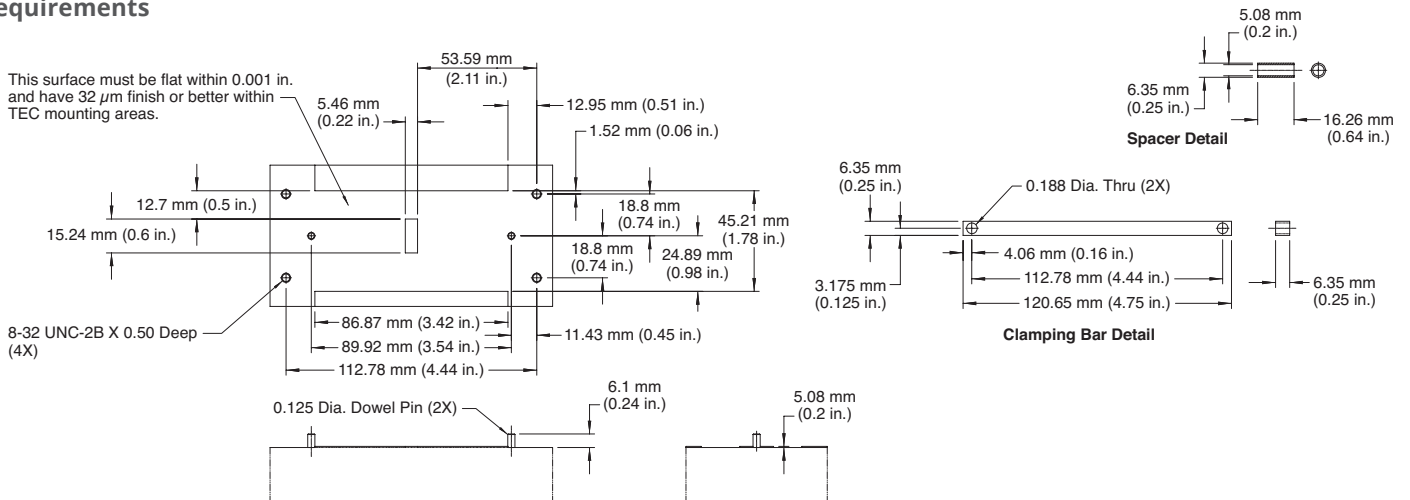
SPECIFICATIONS	Genesis Taipan HD 460-2000	Genesis Taipan HD 480-2000	Genesis Taipan HD 488-3000
Wavelength (nm)	460 ±3	480 ±3	488 ±3
Output Power (mW)	2000	2000	3000
Spatial Mode		TEM ₀₀	
Bandwidth (nm)		<0.5	
Beam Waist Diameter ¹ (1/e ² , mm)		0.07	
Beam Waist Location ^{1,2} (mm)		-65	
M ²			
Horizontal		<1.2	
Vertical		<1.2	
Pointing Stability (μrad/°C)		<5	
Noise			
10 Hz to 10 MHz (% rms)		<1	
10 Hz to 5 kHz (% peak-to-peak)		<10	
Polarization Ratio		Horizontal, >100:1	
Direct Modulation ³		Available	
UTILITY AND ENVIRONMENTAL REQUIREMENTS			
Operating Diode Current (A)	<27	<24	<27
Maximum Diode Current (A)	<32	<29	<33
Diode Voltage (V)		1.5 to 2.2	
Cooling Requirements ⁴		Active cooling required	
Case Temperature (°C)		25 ±2	
Humidity		Non-condensing	
Dimensions (L x W x H)			
Laser Head		134.14 x 44.0 x 64.47 mm (5.28 x 1.73 x 2.54 in.)	
Weight			
Laser Head (g)		730 ±10	

¹ Typical value.² Measured from the output face, negative value corresponds to a location inside the laser head.³ Theoretical limit is >1 MHz; actual performance will be limited by the diode-driver (not included).⁴ Air cooling available with appropriate heat sink and fans.

SPECIFICATIONS	Genesis Taipan HD 532-3000/5000	Genesis Taipan HD 577-3000	Genesis Taipan HD 590-2000
Wavelength (nm)	532 ±3	577 ±3	590 ±3
Output Power (mW)	3000, 5000	3000	2000
Spatial Mode		TEM ₀₀	
Bandwidth (nm)		<0.5	
Beam Waist Diameter ¹ (1/e ² , mm)		0.07	
Beam Waist Location ^{1,2} (mm)		-65	
M ²			
Horizontal		<1.2	
Vertical		<1.2	
Pointing Stability (μrad/°C)		<5	
Noise			
10 Hz to 10 MHz (% rms)		<1	
10 Hz to 5 kHz (% peak-to-peak)		<10	
Polarization Ratio		Horizontal, >100:1	
Direct Modulation ³		Available	
UTILITY AND ENVIRONMENTAL REQUIREMENTS			
Operating Diode Current (A)	<30, <33	<33	<30
Maximum Diode Current (A)	<36, <40	<40	<36
Diode Voltage (V)		1.5 to 2.2	
Cooling Requirements ⁴		Active cooling required	
Case Temperature (°C)		25 ±2	
Humidity		Non-condensing	
Dimensions (L x W x H)			
Laser Head		134.14 x 44.0 x 64.47 mm (5.28 x 1.73 x 2.54 in.)	
Weight			
Laser Head (g)		730 ±10	

¹ Typical value.² Measured from the output face, negative value corresponds to a location inside the laser head.³ Theoretical limit is >1 MHz; actual performance will be limited by the diode-driver (not included).⁴ Air cooling available with appropriate heat sink and fans.

MECHANICAL SPECIFICATIONS

GenesisTaipan
HD-SeriesBase Plate
Requirements

Coherent, Inc.,
5100 Patrick Henry Drive Santa Clara, CA 95054
p. (800) 527-3786 | (408) 764-4983
f. (408) 764-4646

tech.sales@Coherent.com www.Coherent.com

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice. Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all Chameleon systems. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative. Printed in the U.S.A. MC-XXX-17-0M0217 Copyright ©2017 Coherent, Inc.

