


Thermoelectric Coolers (TEC)

MULTI-STAGE THERMOELECTRIC COOLER NL2064T

Multi-Stage Thermoelectric Module

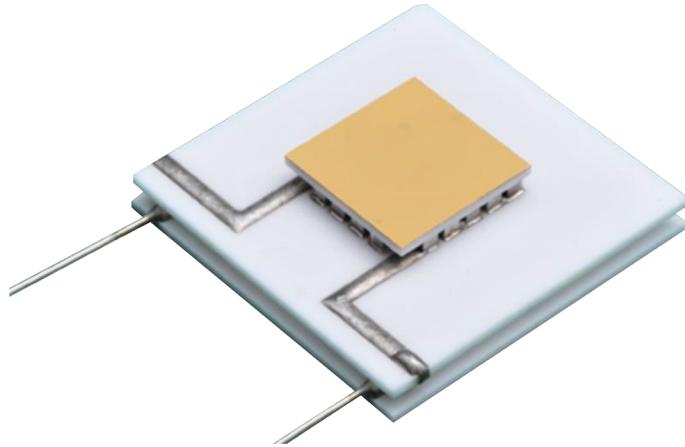

FEATURES

- RoHS EU Compliant
- Rated operating temperature of 85°C
- Maximum processing temperature of 120°C
- Ceramic material: Aluminum oxide top and base, Beryllium oxide mid

MULTI-STAGE THERMOELECTRIC COOLER NL2064T

Nominal Performance in Nitrogen



Hot Side Temperature (°C)	27	50
ΔT_{max} (°C)	93	105
Qmax (watts)	10.4	11.2
I _{max} (amps)	5.4	5.4
V _{max} (vdc)	8.6	9.6
AC Resistance (ohms)	1.43	--

Ordering Options

Model Number	Description
NL2064T-11AB	Both Surfaces are Metallized, Wire Buss Tin Coated
NL2064T-12AB	Hot Side Exterior is Metallized, Wire Buss Tin Coated
NL2064T-13AB	No Metallization, Wire Buss Tin Coated
NL2064T-14AB	No Metallization, Wire Buss Gold Over Ni/ Cu

Typical Performance Curves

Environment: One atmosphere dry nitrogen

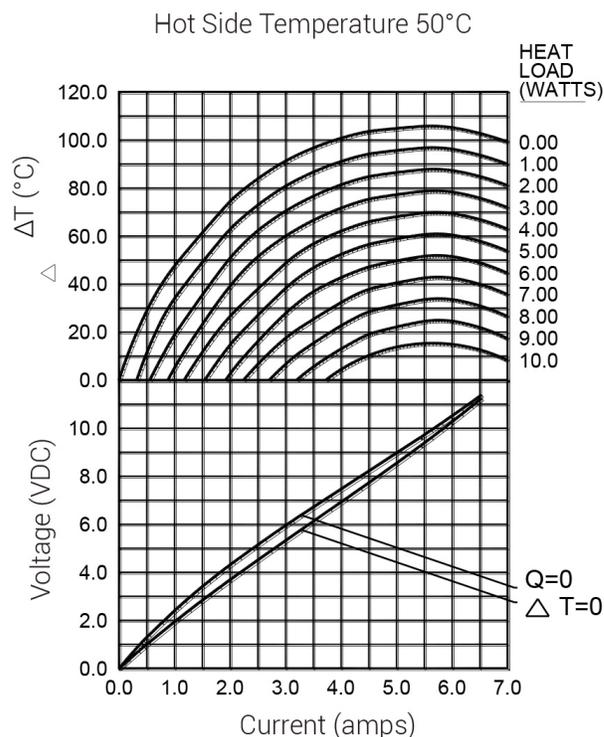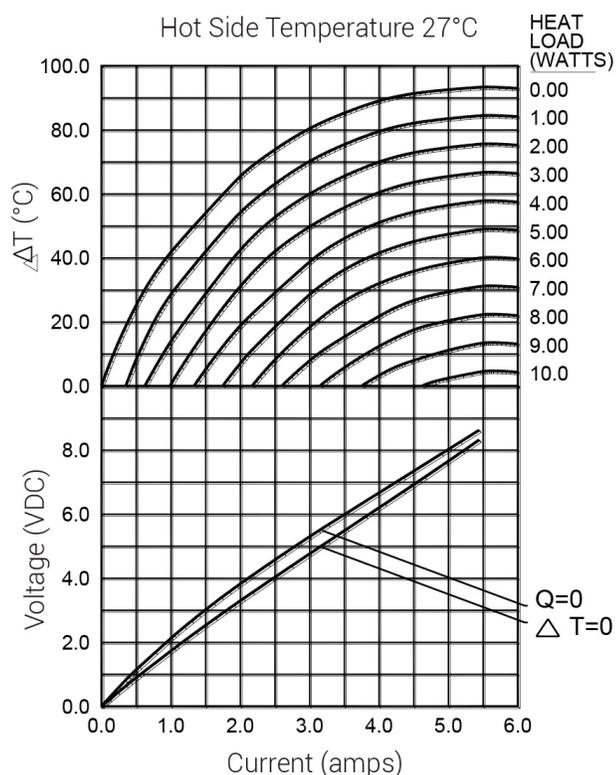

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, please contact us.

Operation Cautions

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

Installation



Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEM Installation Guide.

MULTI-STAGE THERMOELECTRIC COOLER NL2064T

Mechanical Characteristics

Beryllium Oxide Handling Precautions

Beryllium oxide can be toxic only when dust, mist, or fumes containing particles small enough to enter the lungs are inhaled. For the user, precautions required are to avoid grinding, machining or pulverizing the material by mechanical, thermal, or chemical processing.

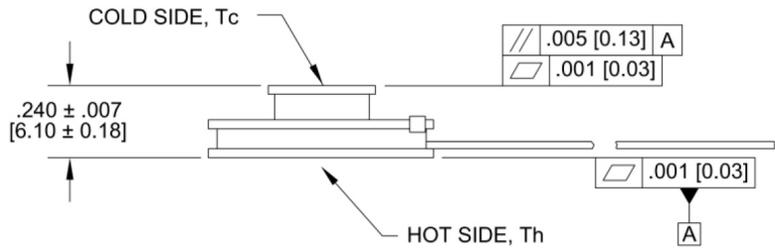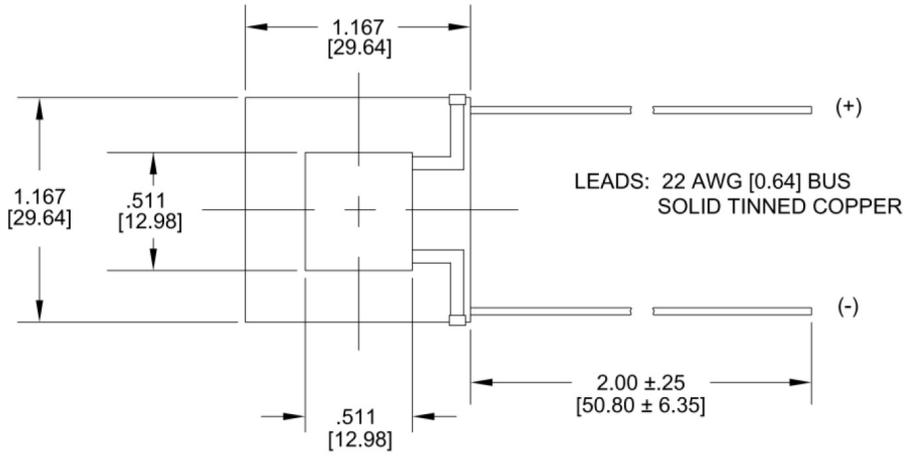

Millimeters are in []

Tolerances are $\pm .030$ [0.76] unless otherwise specified