



PULSED 1064 nm HIGH POWER MINI-BUTTERFLY LASER DIODE MODULE

CM97A1064

The Coherent CM 97A1064 next generation high power single mode laser module has been designed as a light source for pulsed fiber lasers and CW applications that require 1064nm single mode light. Processes and techniques of coupling the fiber to the laser allow high output powers that are very stable with both time and temperature. Devices achieve high kink free output powers of 1.5 W pulse peak.

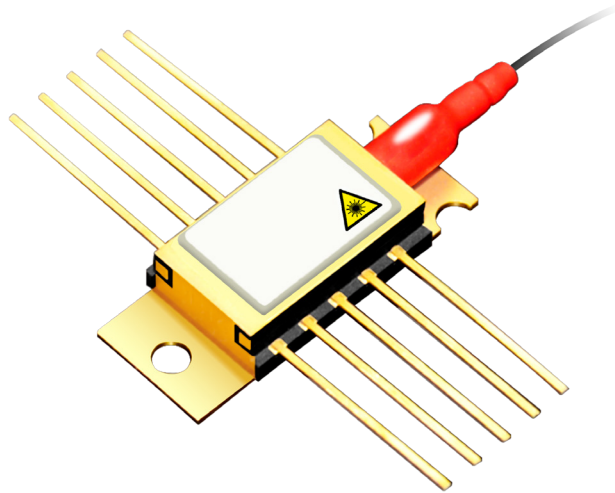

FEATURES

- High kink free pulse output power, up to 1.5 W peak
- Wavelength: 1064 ± 5 nm
- Short pulse operation of 5 ns - 500 ns
- Polarization maintaining single-mode optical fiber
- Internal thermoelectric heat pump and monitor diode
- Hermetically sealed 10-pin mini-butterfly package
- RoHS compliant 

APPLICATIONS

- Fiber lasers
- Sensing

PULSED 1064 nm HIGH POWER MINI-BUTTERFLY LASER DIODE MODULE

Characteristics

Conditions unless otherwise stated:

Case temperature: -20 to +75 °C, Submount temperature: 25 °C, Monitor diode bias: -5 V, CW operation

Parameter	Min	Typ	Max	Unit
Threshold current	40	60	90	mA
CW Operating power at 1.1 A	600	700		mW
Operating pulsed peak power (<500 ns / 500kHz)	1.2	1.4		W
Operating pulsed peak current (<500 ns / 500kHz)			2.2	A
Forward voltage		1.7	2.5	V
Peak wavelength (pulsed operation)	1059	1064	1069	nm
Pulse width	5		500	ns
Repetition rate			500	kHz
Duty cycle			5	%
Rise time			1.6	ns
Monitor detector responsivity	0.5		40	μA/mW
Monitor dark current			50	nA
Thermistor resistance (at 25 °C)	9	10	11	kΩ
Heat pump current (ΔT = 35 °C, If = If max)			1.5	A
Heat pump voltage (ΔT = 35 °C, If = If max)			3.0	V
Polarization extinction ratio		13		dB

Absolute Maximum Ratings


Parameter	Min	Max	Unit
Storage temperature	-40	85	°C
CW laser forward current (10s max)		1.5	A
Laser reverse voltage		2	V
Heat pump current	-2.2	2.2	A
Heat pump voltage	-3.3	3.3	V
Lead soldering temperature (10s max)		350	°C
Fiber bend radius	20		mm

Fiber Characteristics

Parameter	Min	Typ	Max	Unit
Fiber type: Polarization maintaining Nufern PM980-HP or equivalent (e.g. Fujikura SM98)				
Mode field diameter	5.6	6.6	7.6	μm
Buffer diameter	230	250	270	μm
Fiber length (module to fiber end)	1			m
Pristine fiber proof test level	200			psi
Fiber pull to housing	150			psi

PULSED 1064 nm HIGH POWER MINI-BUTTERFLY LASER DIODE MODULE

Connections

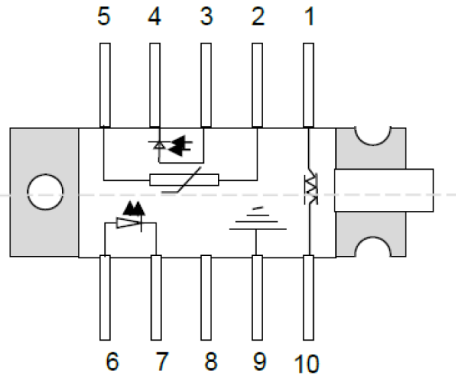

Pin	Description	Pin	Description
1	TEC (+)	6	Laser anode (+)
2	Thermistor	7	Laser cathode (-)
3	Monitor anode (-)	8	NC
4	Monitor cathode (+)	9	Package ground
5	Thermistor	10	TEC (-)

RoHS Compliance

Coherent is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information

CM97A1064	1064 nm High Power Laser Diode Mini-Butterfly Module without FBG
-----------	--

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Coherent before they become applicable to any particular order or contract. In accordance with the Coherent policy of continuous improvement specifications may change without notice. Further details are available from any Coherent sales representative.

Safety Labels



Caution - use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.